


# ADDERLink X200 Extenders

Fully featured USB keyboard, video and mouse extender with 44.1kHz digital stereo audio support for two computers.

AdderLink X200s have been designed for use in applications where up to two computers can have their keyboard, video, audio and mouse control extended up to 300 m (1000 ft.) across CAT5 or higher UTP cable. The AdderLink X200 provides absolute real time keyboard and mouse performance along with hi-definition, hi-resolution video over a VGA interface. The AdderLink X200 receiver can also be used as a remote user station for the AdderView CATx range of KVM switches.

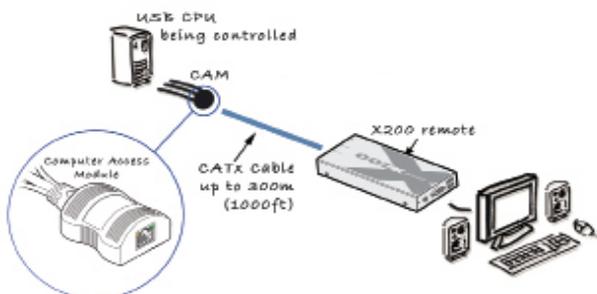

## FEATURES

### Video performance

Industry leading resolutions of:  
1920 x 1200 to 50 m (165 ft.)  
1600 x 1200 to 200 m (650 ft.)  
1280 x 1024 to 300 m (1000 ft.)

### Video compensation

The AdderLink X200 applies 128 steps of signal compensation enabling fine picture adjustments.

### Brightness control

The AdderLink X200 offers its own brightness correction to ensure images are crisp, clear and bright.

### Integrated De-Skew

The AdderLink X200 AS/R model has integrated skew correction with a 300MHz bandwidth (1/4 of a pixel movement at 1600 x 1200 resolution). This removes the video skew issues that can be caused by longer CATx cables.

### Two port integrated KVM switch

Each receiver is fitted with two ports to enable connection to a local and remote computer, or two remote computers. The user can quickly select between these ports using keyboard hotkeys or mouse control. Individual video brightness, compensation and skew settings can be applied to each connection.

### Flexible system configuration

Each receiver may be connected to one or two USB, PS/2 or Sun style computer access modules. Furthermore, the X200 receiver unit may be used as the remote user station for any Adder CATx KVM switch.

### Emulated DDC

Unless an extender actively supports DDC some well-known high performance video cards cannot be used at high resolutions. The AdderLink X200 fully supports DDC.

### Digital audio

44.1kHz digital stereo audio delivers high fidelity audio for speakers.



# ADDERLink X200 Extenders

Fully featured USB keyboard, video and mouse extender with 44.1kHz digital stereo audio support for two computers.

## TECHNICAL SPECIFICATIONS

<b>Video Resolution</b>	1920 x 1200 at distances up to 50 m/165 ft. 1600 x 1200 at distances up to 200 m/650 ft. 1280 x 1024 at distances up to 300 m/1000 ft.	
<b>Extension Distance</b>	Up to 300 m/1000 ft. using CATx cable (x=5,5e,6)	
<b>Devices Supported</b>	Supports computers with USB style keyboard and mice, flat-screen and CRT style monitors with standard HDD-15 video connectors and optional audio through 3.5 mm audio jack.	
<b>O/S Compatability</b>	All known software and operating systems including Windows (all), DOS, Linux, Unix, BSD, Sun OS, Solaris, Mac OS, NetWare etc.	
<b>Connectors (USB CAM)</b>	Video: HDD-15 Keyboard, Mouse: USB type A	Optional audio: 3.5 mm jack CATx: RJ45 connector
<b>Connectors (X200 remote unit)</b>	Video: HDD-15 Keyboard, Mouse: USB Type A Power: 2.5 mm DC jack	Optional audio: 3.5 mm jack CATx: 2 x RJ45 connector
<b>Physical (USB CAM)</b>	Combination of plastic enclosure and cables. Enclosure: 64 mm/2.5 in. x 45 mm/1.8 in. x 25 mm/1 in. Cables: 340 mm/13.4 in. long	
<b>Physical (X200 remote unit)</b>	All metal case, 172 mm/6.8 in. x 26 mm/1 in. x 75 mm/3 in. 430 g/1 lb.	
<b>Power Supply</b>	100 - 240VAC 50/60Hz (X200 remote unit only)	
<b>Order Codes</b> <small>(XX= Mains Lead Country Code: UK = United Kingdom US = United States EURO = Europe AUS = Australia)</small>	Remote unit only (X200): <b>X200/R-XX</b> (100 m/330 ft, no audio/de-skew) <b>X200A/R-XX</b> (100 m/330 ft, audio, no de-skew) <b>X200AS/R-XX</b> (300 m/1000 ft, audio/de-skew)  Additional Computer Access Modules (for second computer): <b>CATX-USB</b> (USB computer access module) <b>CATX-USBA</b> (USB computer access module with audio) <b>CATX-PS2</b> (PS2 computer access module) <b>CATX-PS2A</b> (PS2 computer access module with audio) <b>CATX-SUNA</b> (Computer access module with audio for Sun)	
<b>Approvals</b>	CE, FCC	

Local, Remote and Global Computer Control



### ADDER TECHNOLOGY


Technology House, Trafalgar Way, Bar Hill,  
Cambridge, CB23 8SQ UK  
Tel: +44 (0)1954 780044 Fax: +44 (0)1954 780081  
email: sales@adder.com www.adder.com

### ADDER CORPORATION

29 Water Street  
Newburyport, MA 01950 USA  
Tel: +1 888 932 3337 Fax: +1 888 275 1117  
email: usasales@adder.com www.adder.com

### ADDER TECHNOLOGY ASIA PACIFIC

6 New Industrial Road  
#07-01 Hoe Huat Industrial Building, Singapore 536199  
Tel: +65 6288 5767 Fax: +65 6284 1150  
email: asiasales@adder.com www.adder.com



# ADDERLink X200 Remote User Station

Fully featured USB keyboard, video and mouse extender with 44.1kHz digital stereo audio support and switching for two remote devices.

AdderLink X200s have been designed for use in applications where up to two computer systems can have their keyboard, video, audio and mouse control extended up to 300 m (1000 ft.) across CAT5 or higher UTP cable. The AdderLink X200 provides absolute real time keyboard and mouse performance along with hi-definition, hi-resolution video over a VGA interface. The AdderLink X200 receiver can be connected to the AdderView CATx range of KVM switches as well as to individual computers using Adder's range of computer access modules.



## FEATURES

### Video performance

Industry leading resolutions of:  
 1920 x 1200 to 50 m (165 ft.)  
 1600 x 1200 to 200 m (650 ft.)  
 1280 x 1024 to 300 m (1000 ft.)

### Video compensation

The AdderLink X200 applies 128 steps of signal compensation enabling fine picture adjustments.

### Brightness control

The AdderLink X200 offers its own brightness correction to ensure images are crisp, clear and bright.

### Integrated De-Skew

The AdderLink X200 AS/R model has integrated skew correction with a 300MHz bandwidth (1/4 of a pixel movement at 1600 x 1200 resolution). This removes the video skew issues that can be caused by longer CATx cables.

### Two port integrated KVM switch

Each receiver is fitted with two ports to enable connection to a local and remote computer, or two remote computers. The user can quickly select between these ports using keyboard hotkeys or mouse control. Individual video brightness, compensation and skew settings can be applied to each connection.

### Flexible system configuration


Each receiver may be connected to one or two USB, PS/2 or Sun style computer access modules. Furthermore, the X200 receiver unit may be used as the remote user station for any Adder CATx KVM switch.

### Emulated DDC

Unless an extender actively supports DDC some well-known high performance video cards cannot be used at high resolutions. The AdderLink X200 fully supports DDC.

### Digital audio

44.1kHz digital stereo audio delivers high fidelity audio for speakers.

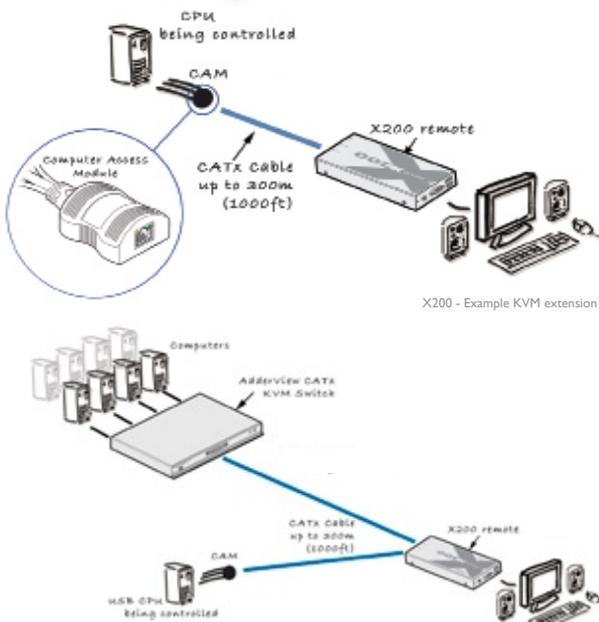

X200 - Example KVM extension



# ADDERLink X200 Remote User Station

Fully featured USB keyboard, video and mouse extender with 44.1kHz digital stereo audio support for two computers.

## TECHNICAL SPECIFICATIONS

<b>Video Resolution</b>	1920 x 1200 at distances up to 50 m/165 ft. 1600 x 1200 at distances up to 200 m/650 ft. 1280 x 1024 at distances up to 300 m/1000 ft.	
<b>Extension Distance</b>	Up to 300 m/1000 ft. using CATx cable (x=5,5e,6)	
<b>Devices Supported</b>	Supports computers with USB style keyboard and mice, flat-screen and CRT style monitors with standard HDD-15 video connectors and optional audio through 3.5 mm audio jack.	
<b>O/S Compatability</b>	All known software and operating systems including Windows (all), DOS, Linux, Unix, BSD, Sun OS, Solaris, Mac OS, NetWare etc.	
<b>Connectors (USB CAM)</b>	Video: HDD-15 Keyboard, Mouse: USB type A	Optional audio: 3.5 mm jack CATx: RJ45 connector
<b>Connectors (X200 remote unit)</b>	Video: HDD-15 Keyboard, Mouse: USB Type A Power: 2.5 mm DC jack	Optional audio: 3.5 mm jack CATx: 2 x RJ45 connector
<b>Physical (USB CAM)</b>	Combination of plastic enclosure and cables. Enclosure: 64 mm/2.5 in. x 45 mm/1.8 in. x 25 mm/1 in. Cables: 340 mm/13.4 in. long	
<b>Physical (X200 remote unit)</b>	All metal case, 172 mm/6.8 in. x 26 mm/1 in. x 75 mm/3 in. 430 g/1 lb.	
<b>Power Supply</b>	100 - 240VAC 50/60Hz (X200 remote unit only)	
<b>Order Codes</b> <small>(XX= Mains Lead Country Code: UK = United Kingdom US = United States EURO = Europe AUS = Australia)</small>	Remote unit only (X200): <b>X200/R-XX</b> (100 m/330 ft, no audio/de-skew) <b>X200A/R-XX</b> (100 m/330 ft, audio, no de-skew) <b>X200AS/R-XX</b> (300 m/1000 ft, audio/de-skew)  Computer access modules: <b>CATX-USB</b> (USB computer access module) <b>CATX-USBA</b> (USB computer access module with audio) <b>CATX-PS2</b> (PS2 computer access module) <b>CATX-PS2A</b> (PS2 computer access module with audio) <b>CATX-SUNA</b> (Computer access module with audio for Sun)	
<b>Approvals</b>	CE, FCC	

Local, Remote and Global Computer Control



**ADDER TECHNOLOGY**  
Technology House, Trafalgar Way, Bar Hill,  
Cambridge, CB23 8SQ UK  
Tel: +44 (0)1954 780044 Fax: +44 (0)1954 780081  
email: sales@adder.com www.adder.com

**ADDER CORPORATION**  
29 Water Street  
Newburyport, MA 01950 USA  
Tel: +1 888 932 3337 Fax: +1 888 275 1117  
email: usasales@adder.com www.adder.com

**ADDER TECHNOLOGY ASIA PACIFIC**  
6 New Industrial Road  
#07-01 Hoe Huat Industrial Building, Singapore 536199  
Tel: +65 6288 5767 Fax: +65 6284 1150  
email: asiasales@adder.com www.adder.com